


LOCINOX[®]

Mortise lock for profiles of 1-1/2" or more


FORTYLOCK

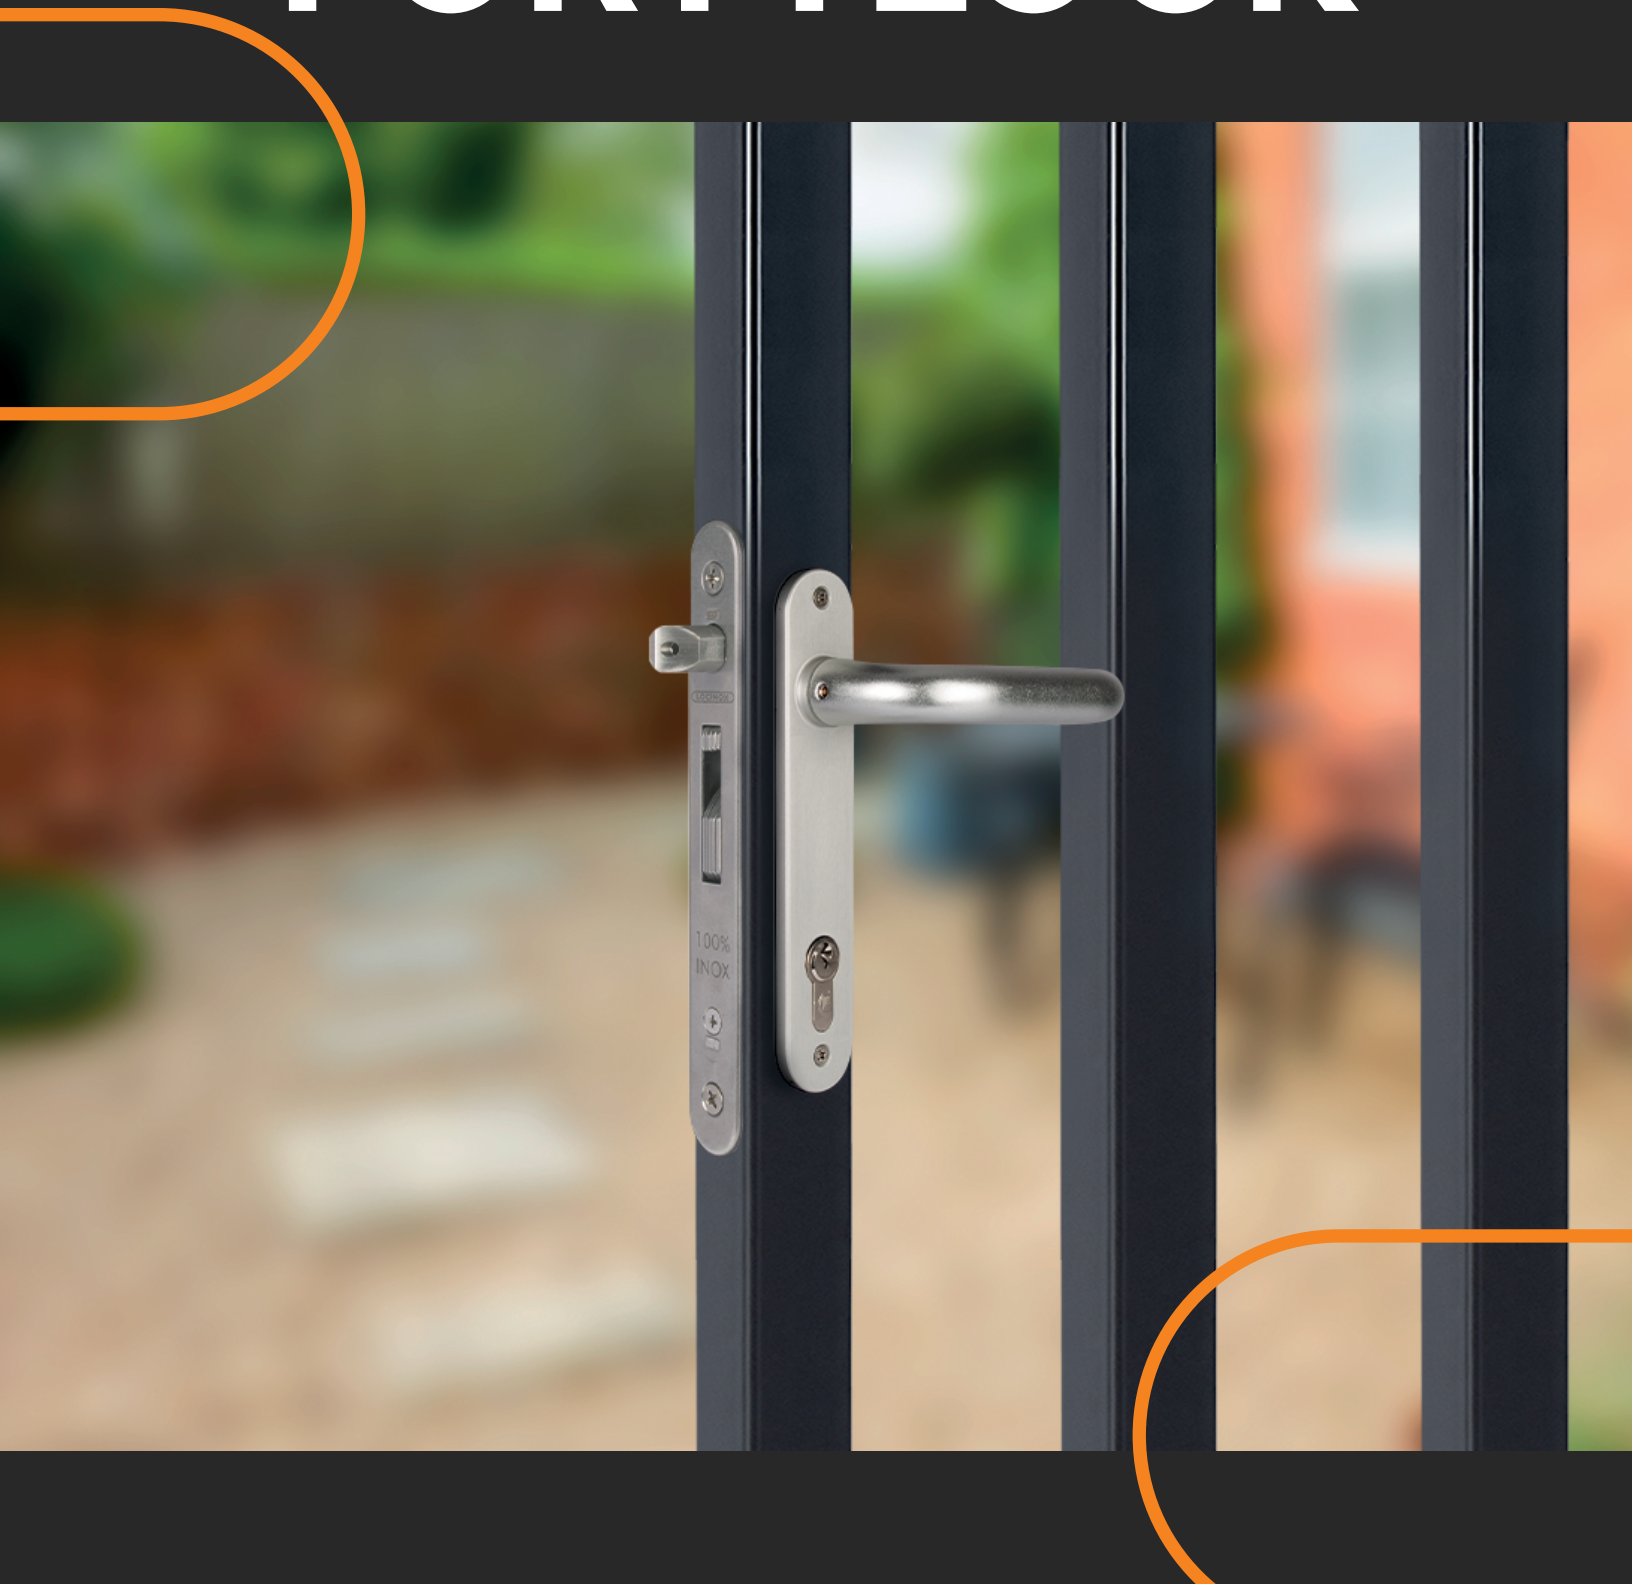


EASY AND FAST INSTALLATION



INSTALLATION MEASUREMENTS

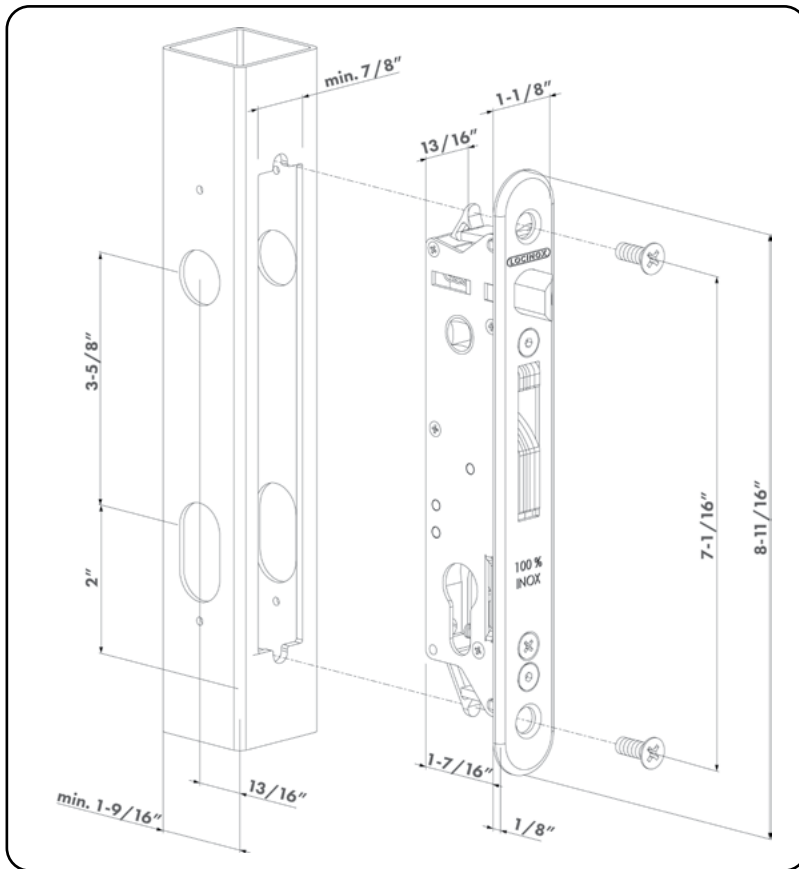

NEW PROFILE PREPARATION

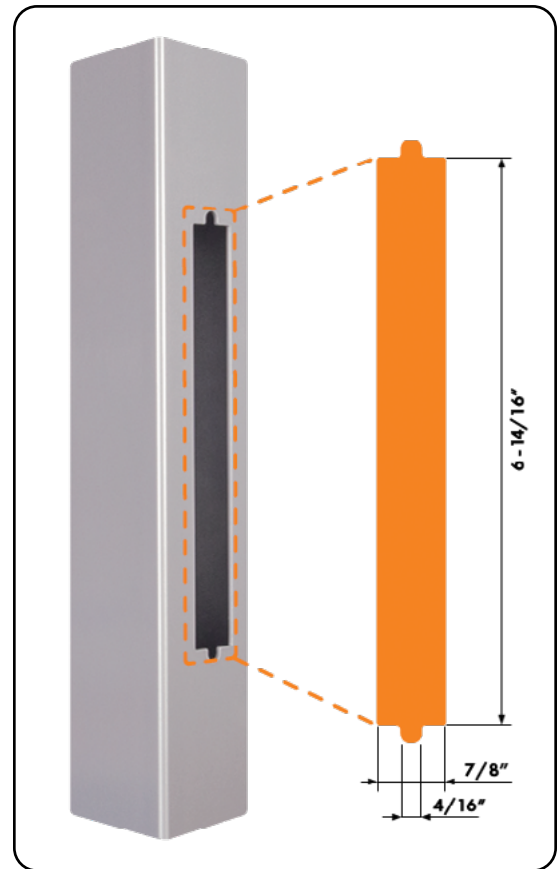

SPECIFICATIONS

- ✓ Lock mechanism with cover plate protects against dirt penetration
- ✓ Patented "Click-It" system makes thread tapping unnecessary
- ✓ Continuous adjustment of the daybolt up to 3/8" without dismounting the lock box
- ✓ Key-operated self-latching bolt
- ✓ Stainless steel mechanism, hook, front plate and latch bolt
- ✓ Easy left or right changing of the self-latching daybolt
- ✓ Throw of the hook: 13/16"
- ✓ The center distance between the cylinder and the handle: 3-5/8"
- ✓ Optional: cover shield for handle & cylinder holes in aluminum, polyamide or stainless steel
- ✓ Handles to be ordered separately
- ✓ Compatible with all Europrofile cylinders



LOCINOX USA



www.locinoxusa.com



877-LOCINOX



help@locinoxusa.com

