

**LOCINOX**<sup>®</sup>

Mortise lock for profiles of 2" or more


# FIFTYLOCK




# EASY AND FAST INSTALLATION



## INSTALLATION MEASUREMENTS

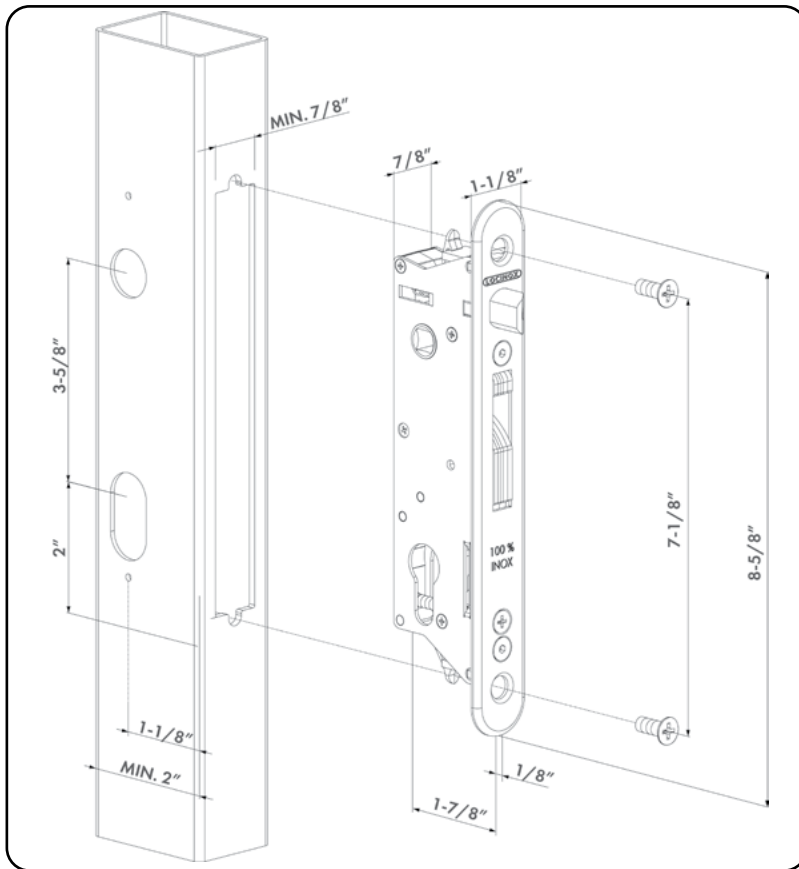

## NEW PROFILE PREPARATION

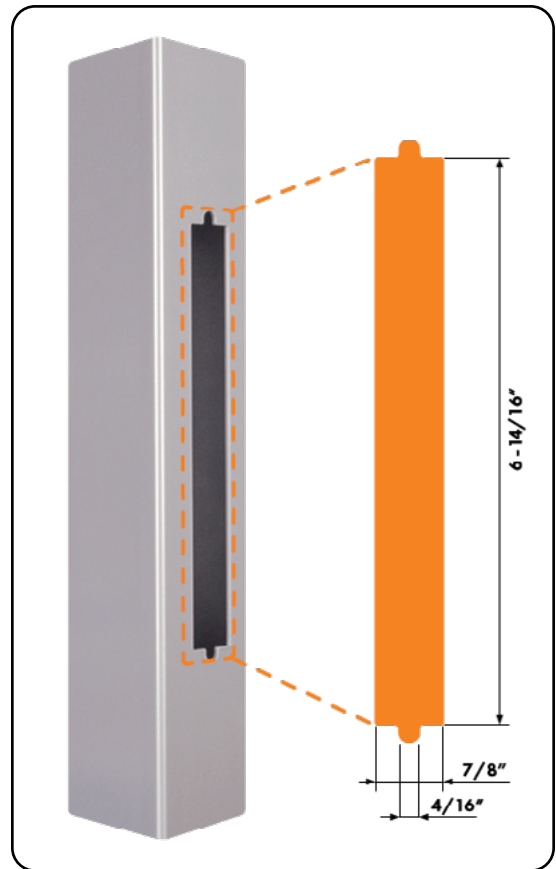

## SPECIFICATIONS

- ✓ Stainless steel lock mechanism with cover plate against dirt penetration
- ✓ Stainless steel mechanism, hook, front plate and latch bolt
- ✓ Backset 1-3/16", for mounting in profiles of 2" or more
- ✓ Continuous adjustment of the daybolt up to 3/8" without dismounting the lock box
- ✓ Key-operated self-latching bolt
- ✓ Easy left or right changing of the self-latching daybolt
- ✓ Throw of the hook: 13/16"
- ✓ Center-distance between cylinder and handles = 3-5/8"
- ✓ Compatible with all Europrofile cylinders
- ✓ Handles to be ordered separately
- ✓ Optional: cover shield for handle & cylinder holes in aluminum, polyamide or stainless steel



**LOCINOX USA**



[www.locinoxusa.com](http://www.locinoxusa.com)



877-LOCINOX



[help@locinoxusa.com](mailto:help@locinoxusa.com)

